


**CIRCULAR STEP FILTER
6 STEPS AT 60 DEGREES**

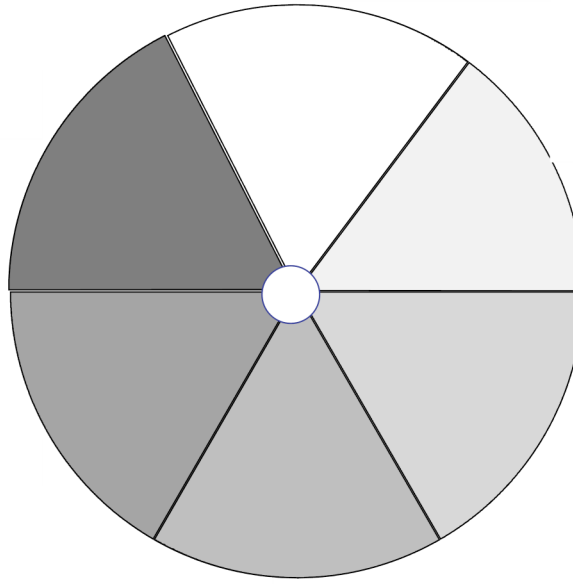

Calibrated Wavelength	550 nm
Construction	Single-surface coating
Deviation at End Point	±3%
Linearity of Density	±5%
Optical Material	BK7 glass
Outside Diameter	±0.2 mm
Parallelism	<3 arc min
Surface Quality	80-50 scratch and dig