




Substrate BK7 Glass  
 Diameter 25.0 +0.0 / -0.5 mm  
 Thickness 1.0 ± 0.25 mm  
 Clear Aperture 90% Outer Diameter  
 Surface Accuracy <5λ / Ø25 mm  
 Surface Quality 60/40 Scratch-Dig  
 Parallelism <3 arcmin  
 Damage Threshold 0.75 W/cm<sup>2</sup> for CW Laser

## ND FILTER w/data

→ Price.....\$30 per filter ←

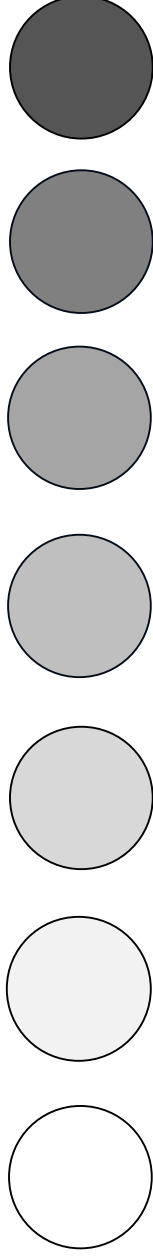

### 400-1000nm

Part # - OD Value	Nominal %T @633nm	Minimum %T (400-800 nm)	Maximum %T (400-800 nm)	Minimum %T (800-1000 nm)	Maximum %T (800-1000 nm)
NDF-0.1	79%	77%	81%	71%	87%
NDF-0.2	63%	61%	65%	57%	69%
NDF-0.3	50%	48%	52%	45%	55%
NDF-0.4	40%	38.5%	41.5%	36%	44%
NDF-0.5	32%	30.5%	33.5%	28%	36%
NDF-0.6	25%	23.5%	26.5%	21%	29%
NDF-1.0	10%	9.0%	11%	6.5%	14%
NDF-1.3	5%	4.8%	5.9%	5.9%	6.8%
NDF-2.0	1.0%	0.8%	1.2%	0.5%	1.5%
NDF-3.0	0.10%	0.06%	0.14%	0.1%	0.25%
NDF-4.0	0.01%	0.02%	0.02%	0.02%	0.02%